

OPPLE
LIGHTING.



Affordable LED-solutions



OPPLE.COM

LED Slim Panel Basic

UGR19 UGR22

- Suitable for recessed and suspended applications
- Replacement for conventional 4x18W luminaire
- Energy saving up to 55%
- Comfortable and uniform light available in UGR22 and UGR19
- Slim design, only 8mm thick
- Solid aluminum frame



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140067185	LEDPanellc-S-B Sq595-36W-4000-WH	36	3060	3000	3000
542004008710	LEDPanellc-S-B Sq595-36W-3000-WH	36	3240	4000	3000
140066707	LEDPanellc-S-B Sq595-36W-4000-WH-U19	36	3060	3000	4000
542004008610	LEDPanellc-S-B Sq595-36W-3000-WH-U19	36	3240	4000	4000

ACCESSORIES

Artikelcode	Item Description
140055484	LEDPanellc-SI Sq600-Surface-Module-WH-CT
140053150	LEDPanellc-SI-E Mounting Springs
140055365	LEDPanellc-SI-E-Suspension-Kit



LED Downlight Basic




- Suitable for recessed applications
- Replacement for conventional 1x18W or 2x26W CFL luminaires
- Energy saving up to 60%
- Flicker-free light with perfect uniformity
- Easy to install due to integrated LED driver



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
540001000510	LEDDownlightRc-B Rd150-12W-4000-WH	12	960	4000	3000
540001000410	LEDDownlightRc-B Rd200-22W-4000-WH	22	1870	4000	3000
540001023800	LEDDownlightRc-B Rd150-12W-3000-WH	12	930	3000	4000
540001023700	LEDDownlightRc-B Rd200-22W-3000-WH	22	960	3000	4000

**Easy to
install**

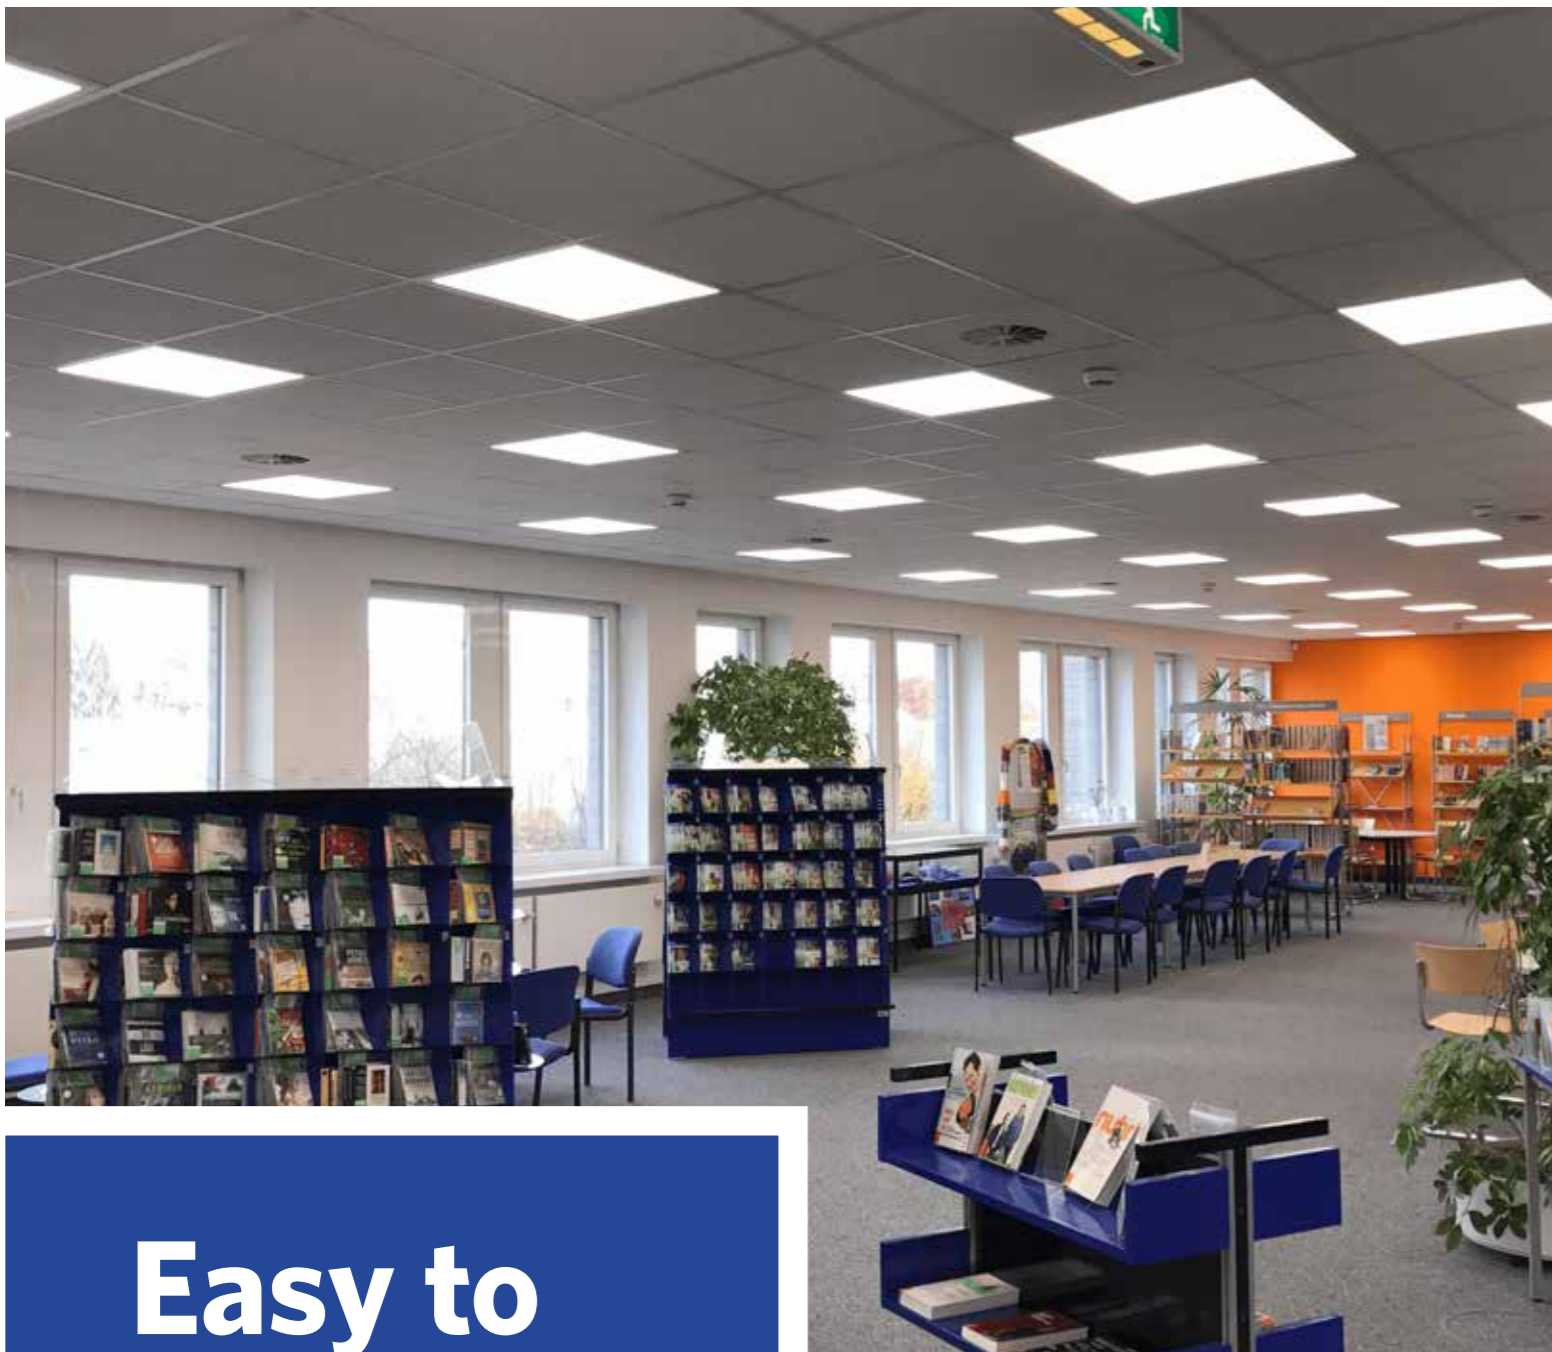

LED Spot EcoMax



- Fixed spotlight range with universal 68 mm cut-out
- Direct replacement for majority of halogen spotlights
- Over 85% savings of energy costs compared to halogen 35W and 50W
- Available in matte white and brushed aluminium finishes
- Can be used in e.g. bathrooms and related environments



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140054076	LEDspotRF-E 4.5W-2700-36D-AL-CT	4.5	330	2700	3000
140054077	LEDspotRF-E 4.5W-4000-36D-AL-CT	4.6	350	4000	3000
140054078	LEDspotRF-E 4.5W-2700-36D-WH-CT	4.7	330	2700	4000
140054079	LEDspotRF-E 4.5W-4000-36D-WH-CT	4.8	350	4000	4000
140055457	LEDspotRF-E 7W-2700-36D-AL	7	510	2700	4000
140055458	LEDspotRF-E 7W-4000-36D-AL	7	530	4000	4000
140055459	LEDspotRF-E 7W-2700-36D-WH	7	510	2700	4000
140055460	LEDspotRF-E 7W-4000-36D-WH	7	530	4000	4000

LED T8 Batten



- Plug & play installation
- High lumen efficiency up to 105 lm/w
- Delivered with clips for surface mounted installation
- Suspension possible with separate accessory kit
- Mechanically connect multiple luminaires via connector accessory
- Energy saving up to 55%



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140063301	LED T8 Batten 600mm 19W 3000K CT	19	1800	3000	3000
140063302	LED T8 Batten 600mm 19W 4000K CT	19	1900	4000	3000
140063303	LED T8 Batten 600mm 19W 6500K CT	19	1900	6500	4000
140063304	LED T8 Batten 1200mm 38W 3000K CT	38	3800	3000	4000
140063305	LED T8 Batten 1200mm 38W 4000K CT	38	4000	4000	4000
140063306	LED T8 Batten 1200mm 38W 6500K CT	38	4000	6500	4000

ACCESSORIES

Artikelcode	Item Description
140063307	LED T8 Batten connector
140063308	LED T8 Batten suspension Kit



**Available
from stock**



LED T5 Batten EcoMax



- Geschikt voor inbouwtoepassingen
- Vervanging van conventionele 4x18W-armaturen
- Energiebesparingen tot 55%
- Comfortabel en gelijkmatig licht beschikbaar in UGR22 en UGR19
- Slank ontwerp, slechts 8 mm hoog
- Solide aluminum frame



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140043898	LED E T5 batten 600 9W 800lm 3000K CT	9	3000	800	3000
140043899	LED E T5 batten 600 9W 800lm 4000K CT	9	4000	800	3000
140043900	LED E T5 batten 1200 18W 1600lm 3000K CT	18	3000	1600	4000
140043901	LED E T5 batten 1200 18W 1600lm 4000K CT	18	4000	1600	4000
140062783	LED P T5 batten 600 9W DIM 4000K CT	9	3000	1000	3000
140062784	LED P T5 batten 600 9W DIM 3000K CT	9	4000	1000	3000
140062785	LED P T5 batten 1200 18W DIM 4000K CT	18	3000	2000	4000
140062786	LED P T5 batten 1200 18W DIM 3000K CT	18	4000	2000	4000

LED T5 Batten S

- Uniform, diffused light, creating a pleasant atmosphere
- Available in 300, 600, 900 and 1200 mm
- Battens connect up to 15 meters
- Incl. power cable, mounting and connection pieces (fixed and flexible)
- Including integrated switch
- Energy saving up to 50%




SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140043904	LED E T5 batten 300 4,5W S 3000K BL	4.5	400	3000	3000
140044077	LED E T5 batten 300 4,5W S 4000K BL	4.5	400	4000	3000
140043903	LED E T5 batten 600 9W S 3000K BL	9	800	3000	4000
140044076	LED E T5 batten 600 9W S 4000K BL	9	800	4000	4000
140043902	LED E T5 batten 900 11W S 3000K BL	11	950	3000	3000
140044075	LED E T5 batten 900 11W S 4000K BL	11	950	4000	3000
140044293	LED E T5 batten 1200 13W S 3000K BL	13	1200	3000	4000
140044292	LED E T5 batten 1200 13W S 4000K BL	13	1200	4000	4000

**Easy
to use**



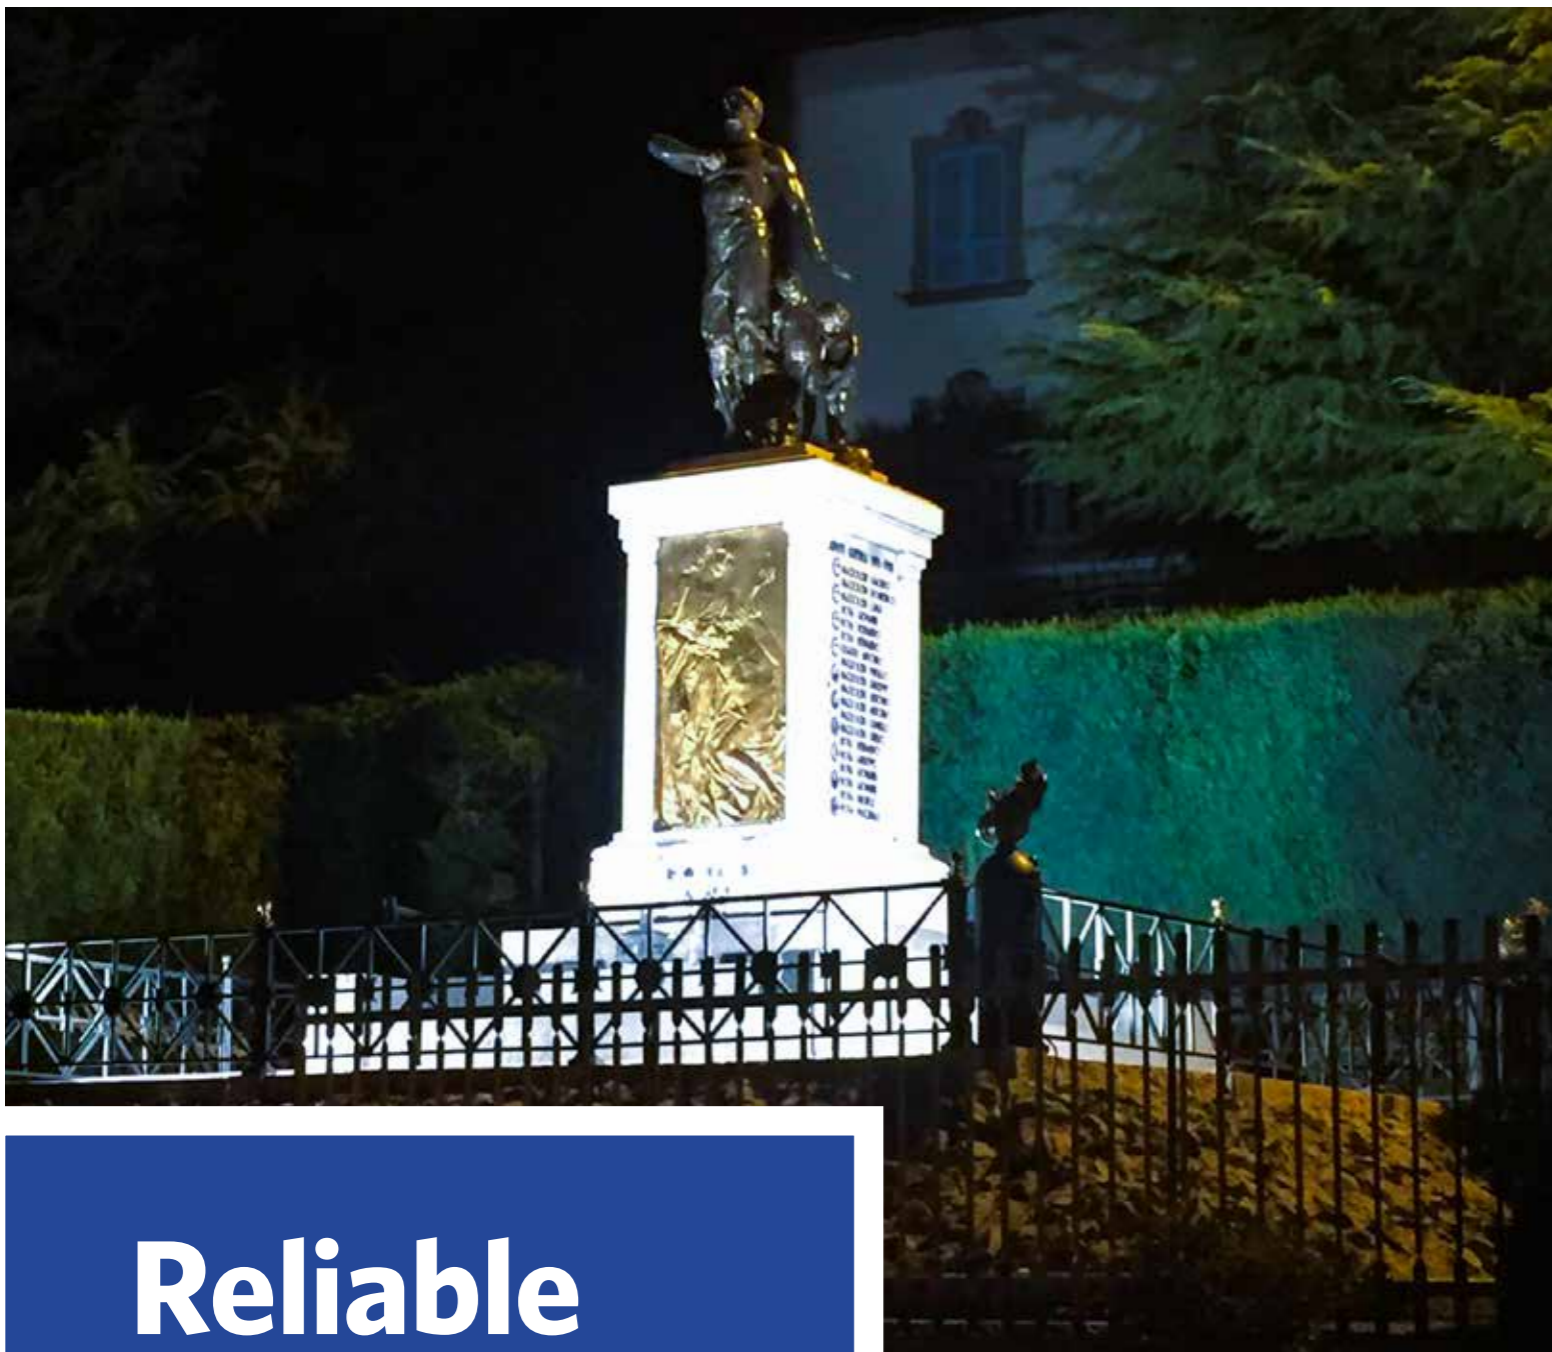

**Reliable
products**

LED Floodlight Basic

- Replacement of halogen and up to 150W HID
- Wide power range from 10W to 70W
- Slim and compact body design due to integrated driver
- IP65 & IK07 for both indoor and outdoor applications
- Compatible brackets and ground spikes available
- IP65 daylight and motion sensor accessory available



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
543017000200	LED Flood-B Re125-10W-4000	10	800	4000	3000
543017000300	LED Flood-B Re170-20W-4000	20	1700	4000	3000
543017000400	LED Flood-B Re191-30W-4000	30	2500	4000	4000
543017009900	LED Flood-B Re217-50W-4000	50	4250	4000	4000
543017010000	LED Flood-B Re266-70W-4000	70	5950	4000	4000

ACCESSORIES

Artikelcode	Item Description	Artikelcode	Item Description
140060789	LED Flood-E-Re150-Spike-BL	140060791	LED Flood-E-Re150-Bracket-WH
140060792	LED Flood-E-Re250-280-Spike-BL	140060793	LED Flood-E-Re250-280-Bracket-BL
140060790	LED Flood-E-Re150-Bracket-BL	140065060	LED Flood-E-Motion-Sensor



LED T8 Tube

- Single-ended full IEC compliant with patented driver
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass
- High efficacy up to 120 lm/W
- Up to 62% lower energy consumption than fluorescent



SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140062610	LED P T8 glass 600 8W 100pct 3000K CT	8	1050	3000	3000
140062611	LED P T8 glass 600 8W 100pct 4000K CT	8	1050	4000	3000
140062612	LED P T8 glass 600 8W 100pct 6500K CT	8	1050	6500	4000
140062613	LED P T8 glass 1200 16W 100pct 3000K CT	16	2100	3000	4000
140062614	LED P T8 glass 1200 16W 100pct 4000K CT	16	2100	4000	3000
140062615	LED P T8 glass 1200 16W 100pct 6500K CT	16	2100	6500	3000
140062616	LED P T8 glass 1500 23W 100pct 3000K CT	23	3100	3000	4000
140062617	LED P T8 glass 1500 23W 100pct 4000K CT	23	3100	4000	4000
140062618	LED P T8 glass 1500 23W 100pct 6500K CT	23	3100	6500	4000



**Easy to
replace**

LED Filament A60



- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- Creating cosy atmosphere
- No UV / IR radiance so there is less risk of damage
- 4000K available for Frosted A60 lamps
- Up to 86% less energy consumption than traditional bulbs

SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
500010001400	LED-E-A60-FILA-E27-4W-2700K-CL	4	470	2700	3000
500010001500	LED-E-A60-FILA-E27-7W-2700K-CL	7	806	2700	3000
500010001100	LED-E-A60-FILA-E27-4.5W-DIM-2700K-CL	4.5	470	2700	4000
500010001000	LED-E-A60-FILA-E27-7W-DIM-2700K-CL	7	806	2700	4000
500010001900	LED-E-A60-FILA-E27-4.5W-DIM-2700K-FR	4	470	2700	3000
500010001200	LED-E-A60-FILA-E27-7W-DIM-2700K-FR	7	806	2700	3000
500010001300	LED-E-A60-FILA-E27-4.5W-DIM-4000K-FR	4.5	470	4000	4000
500010000400	LED-E-A60-FILA-E27-7W-DIM-4000K-FR	7	806	4000	4000

LED Reflector EcoMax GU10



- Full retrofit of existing halogen GU10 lamps
- Dimmable versions available up to 575lm
- Available in 3000K and 4000K
- Light silver coloured
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods
- Up to 87% lower energy consumption than halogen

SPECIFICATIONS

Item Code	Item Description	Power (W)	Lumen	UGR	CCT (K)
140060948	LED-E-GU10-3,5W-3000K-36D-DIM	3.5	245	3000	3000
140060952	LED-E-GU10-3,5W-4000K-36D-DIM	3.5	260	4000	3000
140060949	LED-E-GU10-5,2W-3000K-36D-DIM	5.2	350	3000	4000
140060953	LED-E-GU10-5,2W-4000K-36D-DIM	5.2	360	4000	4000
140060951	LED-E-GU10-7,5W-3000K-36D-DIM	7.5	565	3000	3000
140060955	LED-E-GU10-7,5W-4000K-36D-DIM	7.5	575	4000	3000



No rights can be derived from the
content in this brochure.
Data subject to change.

All specifications are available in the
Download Center at **www.opple.com**.

OPPLE LIGHTING

Materiaalweg 6
5681 RJ Best
T: 088 056 7888
E: service@opple.com
I: www.opple.com