




Flood HO for golf courses

EFFECTIVE AND ENERGY-EFFICIENT

LED lighting for
your driving range

OPPLE.COM



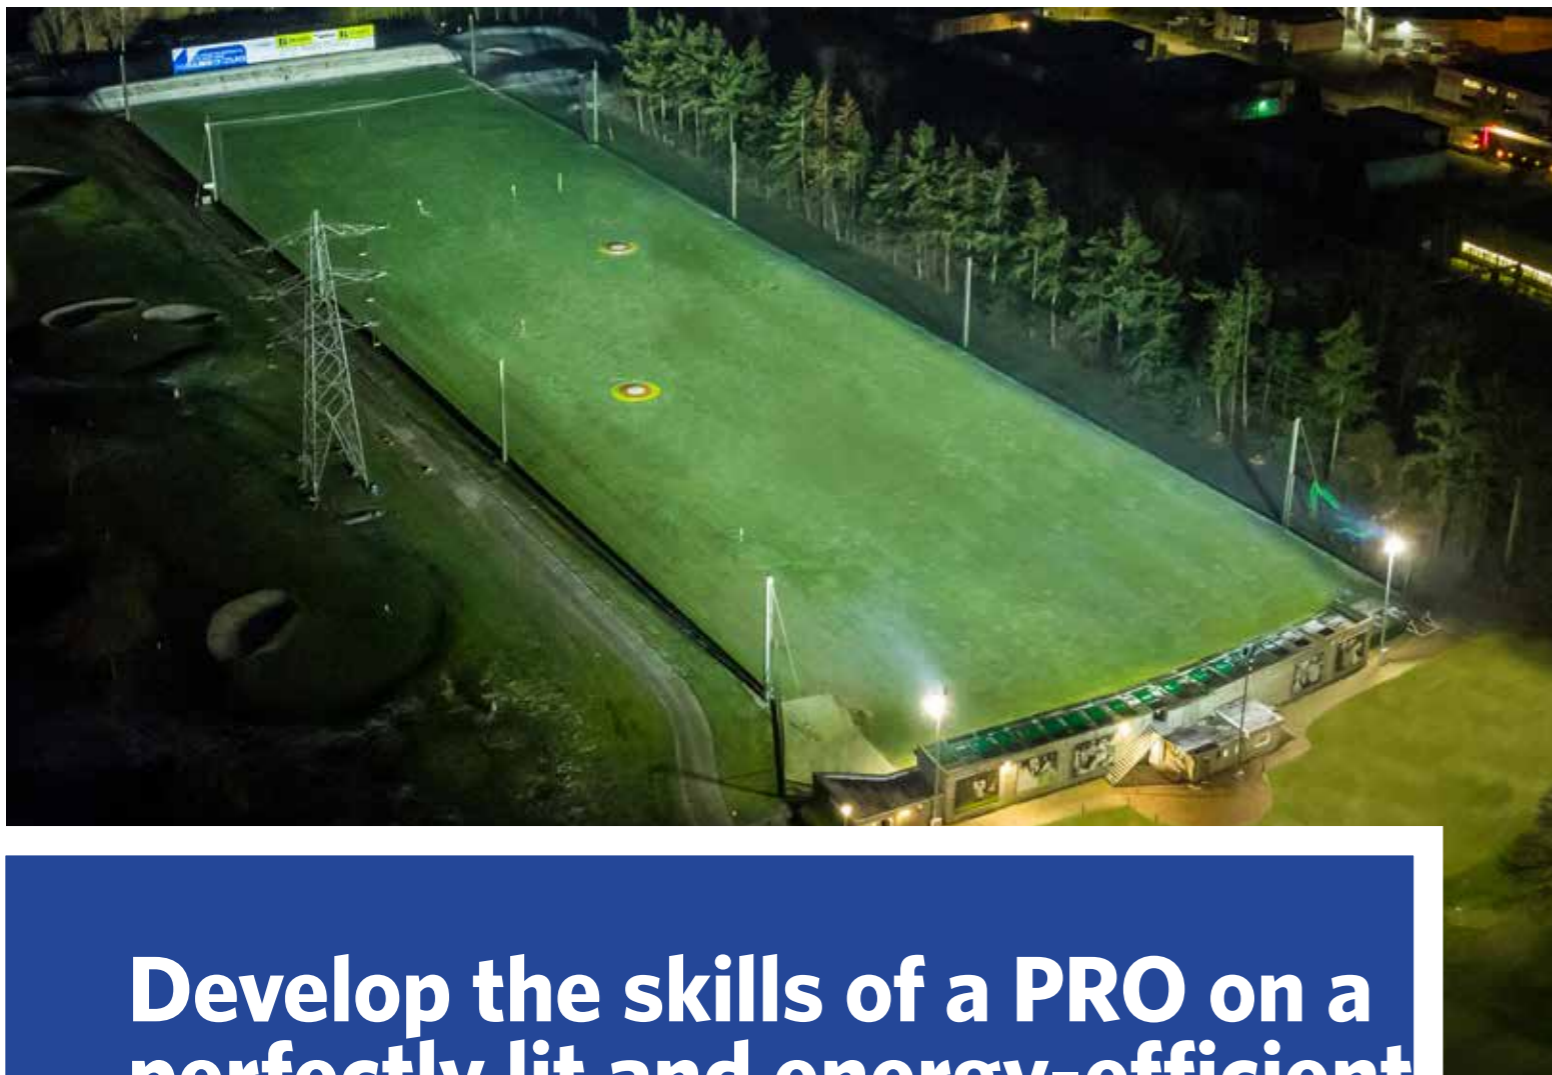


Develop the skills of a PRO on a perfectly lit and energy-efficient driving range!

CHOOSE OPPLE'S ENERGY-EFFICIENT FLOOD HO LED LIGHTING FOR GOLF COURSES

OPPLE has developed a practical range of modular LED luminaires to light your driving range. The output from OPPLE's LED lighting solution complies fully with the European NEN 12193 standard for sports lighting and the recommendations for golf course lighting published by the NSVV and NOC*NSF. Furthermore, only the fairway is lit and the surrounding natural environment remains unaffected by unwanted light scatter.

Practice your golf skills on an energy-efficient, environmentally friendly driving range.

- Unique luminaire with a very narrow beam that only illuminates the driving range and allows you to track the flight of your ball perfectly
- Energy savings of up to 60% compared to conventional lighting
- This luminaire completely eliminates unwanted light scatter outside the fairway
- Even greater energy savings are possible with the 1 - 10 V dimming function
- Maintenance-free, no need to change lamps
- Complies with the European standard for sports lighting (EN12193) and the recommendations for golf course lighting published by NSVV and NOC*NSF
- Immediate 100% light output when powered up and can be switched on again immediately after switching off
- Fully protected against dust and moisture (IP66), shock-resistant (IK08)
- Practical and easy to install thanks to the IP66 connector included in the set
- Modular design for maximum flexibility

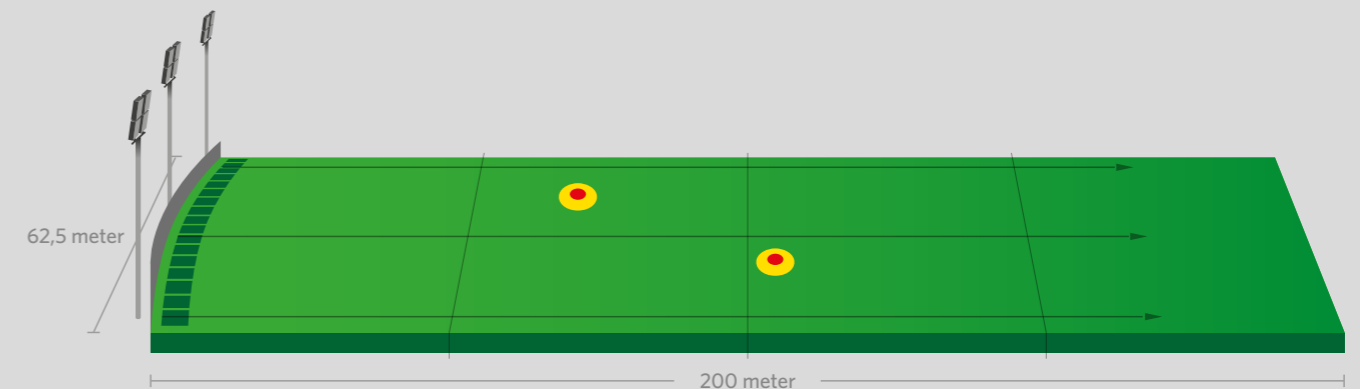

Post height	10-15m
Products	6x Flood HO 620W XN
Average vertical light intensity	>50lx
Colour rendering	>70

Surprise and delight your players with a brightly lit driving range.

Choose the perfect solution from our LED Flood range:

LED FLOOD HO

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	CCT (K)	Beam angle (°)
543017013300	LED Flood HO-310W-5700-W	HID 500W	310	40.000	5700	120° x 30°
543017012600	LED Flood HO-310W-5700-N	HID 500W	310	40.000	5700	60°
543017012500	LED Flood HO-310W-5700-XN	HID 500W	310	40.000	5700	25°
543017012700	LED Flood HO-620W-5700-W	HID 1000W	620	80.000	5700	120° x 30°
543017012600	LED Flood HO-620W-5700-N	HID 1000W	620	80.000	5700	60°
543017012500	LED Flood HO-620W-5700-XN*	HID 1000W	620	80.000	5700	25°
543098005900	LED Flood HO-SafetyCable*					
543098006000	LED Flood HO-MountingKit-2Mod*					

LED FLOODLIGHT PERFORMER

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	CCT (K)	Beam angle (°)
140062030	LED Flood-P Re440-90W-4000-W-BL	Halogen 750W	90	11.250	4000	100°
140062031	LED Flood-P Re440-90W-4000-AS-BL	Halogen 750W	90	11.250	4000	115° x 55°
140062032	LED Flood-P Re440-125W-4000-W-BL	Halogen 1000W	125	15.625	4000	100°
140062033	LED Flood-P Re440-125W-4000-AS-BL	Halogen 1000W	125	15.625	4000	115° x 55°
140062034	LED Flood-P Re440-160W-4000-W-BL	Halogen 1500W	160	20.000	4000	100°
140062035	LED Flood-P Re440-160W-4000-AS-BL	Halogen 1500W	160	20.000	4000	115° x 55°

* The following products were used for the driving range featured in this brochure: LED Flood HO 620W XN, Mounting Kit and the Safety Cable.



LED Flood HO
310W Module



LED Flood HO
620W Modules



LED Flood HO
Mounting Kit



LED Flood HO
Safety Cable



LED Flood
High Power

We reserve the right to make changes without prior notice.

All specifications are available in the Download Centre on our website: www.opple.com.

OPPLE LIGHTING

Materiaalweg 6

5681 RJ Best

T: 088 056 7888

E: service@opple.com

I: www.opple.com