



LED Recessed Spot Ava

- Energy saving up to 80% in comparison to a traditional light source
- Tilttable, also for IP44 versions
- Beam angle of 30° creates a perfect accent light
- Warm white light (2700K)
- Available in matte white (MW) and brushed aluminium (BA) finishes

IP44



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Energy Level	Weight (kg/pc)
140049619	LED HRS 7W Dim 2700K 30D Ava MW CT	Halogen 35W	7	310	44	2700	30 °	A	0.20
140049621	LED HRS 7W Dim 2700K 30D Ava BA CT	Halogen 35W	7	310	44	2700	30 °	A	0.20
140049625	LED HRS 9W Dim 2700K 30D Ava MW CT	Halogen 50W	9	430	47	2700	30 °	A	0.29
140049627	LED HRS 9W Dim 2700K 30D Ava BA CT	Halogen 50W	9	430	47	2700	30 °	A	0.29
140058060	LED HRS 7W Dim 2700K 30D Ava IP44 BA	Halogen 35W	7	330	50	2700	30 °	A	0.34
140058061	LED HRS 7W Dim 2700K 30D Ava IP44 MW	Halogen 35W	7	330	50	2700	30 °	A	0.34

See appendix 1 for dimmer compatibility list

Technical Specifications


Lifespan (L70B50)	30,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	50,000
Dimmable	Yes (Triac)
Maximum tilt angle	25 °
Finishing	Brushed Aluminum / Matte white
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20 / IP44
Protection class	II
Control gear included	Yes

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No


Ambient Conditions

Operating temperature	-20 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C




Dimensional Drawing (mm)


LED HRS 7W Dim 2700K 30D Ava

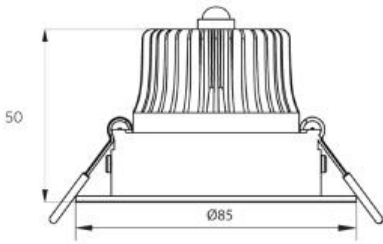

LED HRS 9W Dim 2700K 30D Ava

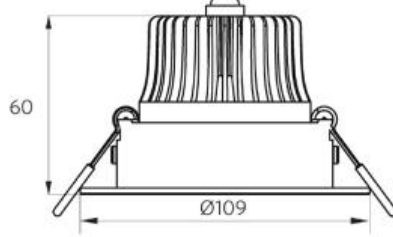

LED HRS 7W Dim 2700K 30D Ava IP44

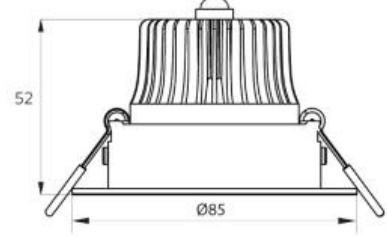

LED HRS 7W Dim 2700K 30D Ava
Driver



Installation Opening Drawing (mm)

LED HRS 7W Dim 2700K 30D Ava
Ø68-76



LED HRS 9W Dim 2700K 30D Ava
Ø95

