



LED T8 Batten

- Plug & play installation
- High lumen efficiency up to 105 lm/w
- Delivered with clips for surface mounted installation
- Suspension possible with separate accessory kit
- Mechanically connect multiple luminaires via connector accessory
- Energy saving up to 55%



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140063301	LED T8 Batten 600mm 19W 3000K CT	TL 2x18W	19	1800	95	3000	0.29
140063302	LED T8 Batten 600mm 19W 4000K CT	TL 2x18W	19	1900	100	4000	0.29
140063303	LED T8 Batten 600mm 19W 6500K CT	TL 2x18W	19	1900	100	6500	0.29
140063304	LED T8 Batten 1200mm 38W 3000K CT	TL 2x36W	38	3800	100	3000	0.47
140063305	LED T8 Batten 1200mm 38W 4000K CT	TL 2x36W	38	4000	105	4000	0.47
140063306	LED T8 Batten 1200mm 38W 6500K CT	TL 2x36W	38	4000	105	6500	0.47

Accessories



140063307
LED T8 Batten connector



140063308
LED T8 Batten suspension Kit

Technical Specifications

Lifespan (L70B50)	30,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	100,000
Dimmable	No
Beam angle	120 °
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	I
Risk group	RG0
Control gear included	Yes
Power factor	≥ 0.90

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No

Mechanical Properties

Material housing	Aluminium
------------------	-----------


Ambient Conditions

Operating temperature	-10 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C



Dimensional Drawing (mm)

LED T8 Batten 600mm 19W

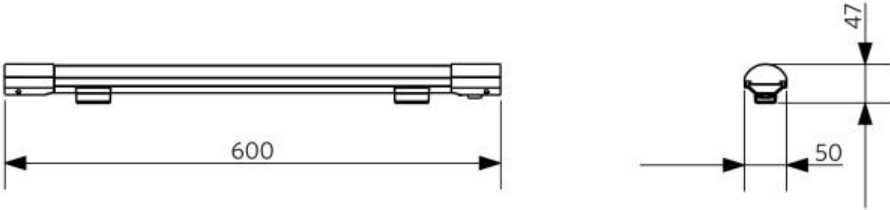

LED T8 Batten 1200mm 38W

