



LED T5 Batten S with switch

- Uniform, diffused light, creating a pleasant atmosphere
- Available in 300, 600, 900 and 1200 mm
- Battens connect up to 15 meters
- Incl. power cable, mounting and connection pieces (fixed and flexible)
- Including integrated switch
- Energy saving up to 50%

Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Energy Level | Weight (kg/pc) |
|-----------|-------------------------------------|-------------------|-----------|-------|-----------------|---------|--------------|----------------|
| 140043904 | LED E T5 batten 300 4.5W S 3000K BL | TL 1x9W | 4.5 | 400 | 89 | 3000 | A+ | 0.08 |
| 140044077 | LED E T5 batten 300 4.5W S 4000K BL | TL 1x9W | 4.5 | 400 | 89 | 4000 | A+ | 0.08 |
| 140043903 | LED E T5 batten 600 9W S 3000K BL | TL 1x18W | 9 | 800 | 89 | 3000 | A+ | 0.14 |
| 140044076 | LED E T5 batten 600 9W S 4000K BL | TL 1x18W | 9 | 800 | 89 | 4000 | A+ | 0.14 |
| 140043902 | LED E T5 batten 900 11W S 3000K BL | TL 1x18W | 11 | 950 | 86 | 3000 | A+ | 0.19 |
| 140044075 | LED E T5 batten 900 11W S 4000K BL | TL 1x18W | 11 | 950 | 86 | 4000 | A+ | 0.19 |
| 140044293 | LED E T5 batten 1200 13W S 3000K BL | TL 1x30W | 13 | 1200 | 92 | 3000 | A+ | 0.25 |
| 140044292 | LED E T5 batten 1200 13W S 4000K BL | TL 1x30W | 13 | 1200 | 92 | 4000 | A+ | 0.25 |

Technical Specifications

| | |
|----------------------------|----------|
| Lifespan (L70B50) | 40,000 h |
| Lifespan (L80B50) | 30,000 h |
| On-/Off-cycles | 100,000 |
| Dimmable | No |
| Beam angle | 140 ° |
| Finishing | White |
| Colour rendering index CRI | ≥ 80 |
| Degree of protection (IP) | IP20 |
| Protection class | II |
| Risk group | RG0 |
| Control gear included | Yes |
| Power factor | ≥ 0.90 |

Electrical Supply


| | |
|------------------|--------------|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V AC |
| DC input voltage | No |

Mechanical Properties

| | |
|------------------|---------------|
| Material housing | Polycarbonate |
|------------------|---------------|


Ambient Conditions

| | |
|-------------------------|-------------|
| Operating temperature | -20 ~ 40 °C |
| Application temperature | 25 °C |
| Storage environment | -25 ~ 50 °C |




Dimensional Drawing (mm)


LED E T5 batten 300

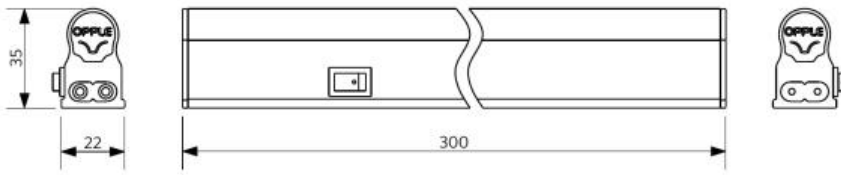

LED E T5 batten 600

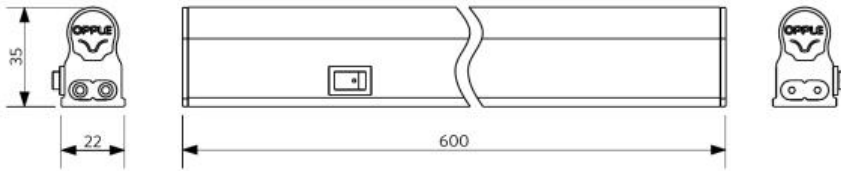

LED E T5 batten 900

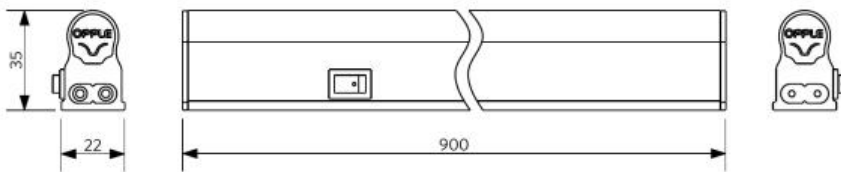

LED E T5 batten 1200

