



LED Spot Performer Swing

- Powerful recessed, rotatable and tiltable spot
- Clean, compact design
- Die-cast aluminium housing
- Excellent colour rendering with CRI 90
- High efficiency up to 100 lm/W



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Weight (kg/pc)
541003067800	LEDspotRS -P 20W-3000-60D-WH	HID 35W	20	1800	90	3000	60 °	0.57
541003067900	LEDspotRS -P 20W-4000-60D-WH	HID 35W	20	2000	100	4000	60 °	0.57
541003068200	LEDspotRS -P 35W-3000-60D-WH	HID 50W	35	3150	90	3000	60 °	1.07
541003068300	LEDspotRS -P 35W-4000-60D-WH	HID 50W	35	3500	100	4000	60 °	1.07

Technical Specifications

Lifespan (L70B50)	50,000 h
Lifespan (L80B50)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmable	No
Maximum tilt angle	40 °
Finishing	White
Colour rendering index CRI	≥ 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	II
Risk group	RG0
Control gear included	Yes
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	0.5 %
Power factor	≥ 0.90

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No

Mechanical Properties

Material housing	Aluminium
Optical material	Coated Polycarbonate


Ambient Conditions

Operating temperature	-10 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C





Dimensional Drawing (mm)



LEDSpotRS -P 20W
Driver

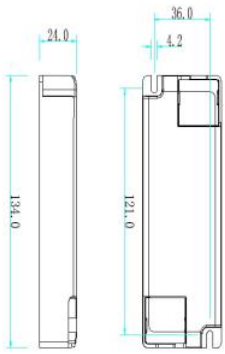



LEDSpotRS -P 35W
Driver

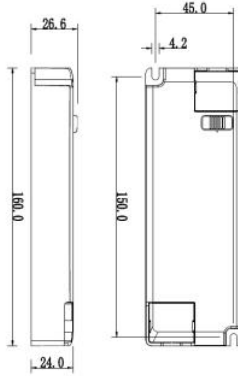

LEDSpotRS -P 20W



LEDSpotRS -P 35W



Installation Opening Drawing (mm)

LEDSpotRS -P 20W
Ø120-130



LEDSpotRS -P 35W
Ø160-175

