



LED Slim Panel EcoMax UGR22



- Slim and well designed, also suitable for suspension
- Up to 55% lower energy consumption vs TL
- Suspension kit and ceiling clip accessories available
- Surface module available (65mm thickness)

Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140062700	LEDPanelRc-S-E2 Sq595-34W-3000-WH-U22	TL 4x18W	34	3500	105	3000	3.20
140062701	LEDPanelRc-S-E2 Sq595-34W-4000-WH-U22	TL 4x18W	34	3500	105	4000	3.20
140062706	LEDPanelRc-S-E2 Re295-34W-3000-WH-U22	TL 2x36W	34	3500	105	3000	3.20
140062707	LEDPanelRc-S-E2 Re295-34W-4000-WH-U22	TL 2x36W	34	3500	105	4000	3.20

Available on request with 3- pole Wieland GST18i connector
Emergency lighting available on request

Accessories



140055484
LEDPanelRc-SI Sq600-Surface-Module-WH-CT



140055486
LEDPanelRc-SI Re300-Surface-Module-WH-CT



140053150
LEDPanelRc-SI-E Mounting-Springs



140055365
LEDPanel-SI-E-Suspension-Kit

Technical Specifications

Lifespan (L70B50)	50,000 h
Lifespan (L80B50)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmable	No
Beam angle	120 °
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
UGR	22
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group	RG0
Control gear included	Yes
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	1 %
Power factor	≥ 0.90

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	Yes, see Appendix 2

Mechanical Properties



Material housing	Aluminium
Optical material	Polystyrene
Cover material	Polycarbonate

Ambient Conditions

Operating temperature	-10 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C



Dimensional Drawing (mm)

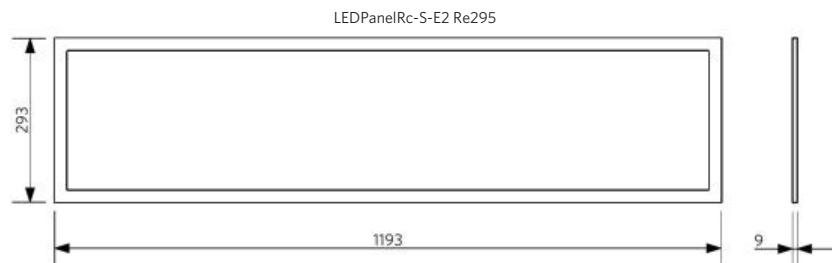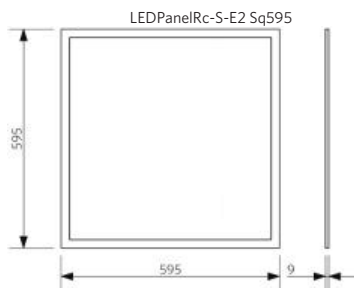

Installation Opening Drawing (mm)

LEDPanelRc-S-E2 Sq595
570 x 570



LEDPanelRc-S-E2 Re295
270 x 1170

