

LED Smart Lighting

Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	UGR	CCT (K)
542003015600	LEDPanelRc-Mo Sq595-35W-BLE-3000-WH-U19	CFL 1x55W	35	3800	109	19	3000
542003015700	LEDPanelRc-Mo Sq595-35W-BLE-4000-WH-U19	CFL 1x55W	35	4000	114	19	4000
542008002100	LEDPanelRc-Sy Sq595-35W-BLE-3000-WH-U19	TL 4x18W	35	3600	103	19	3000
542008002200	LEDPanelRc-Sy Sq595-35W-BLE-4000-WH-U19	TL 4x18W	35	3800	108	19	4000
542008002300	LEDPanelRc-Sy Re295-35W-BLE-3000-WH-U19	TL 4x18W	35	3600	103	19	3000
542008002400	LEDPanelRc-Sy Re295-35W-BLE-4000-WH-U19	TL 4x18W	35	3800	108	19	4000
542004014000	LEDPanelRc-S4 Sq595-30W-BLE-3000-WH-U19	TL 4x18W	30	3300	110	19	3000
542004014100	LEDPanelRc-S4 Sq595-30W-BLE-4000-WH-U19	TL 4x18W	30	3500	115	19	4000
542004014200	LEDPanelRc-S4 Re295-30W-BLE-3000-WH-U19	TL 2x36W	30	3300	110	19	3000
542004014300	LEDPanelRc-S4 Re295-30W-BLE-4000-WH-U19	TL 2x36W	30	3500	115	19	4000
542005004900	LEDLima L12-15W-3000-U19-BLE	TL 1x28W	15	1725	110	19	3000
542005004800	LEDLima L12-15W-4000-U19-BLE	TL 1x28W	15	1800	115	19	4000
542005004700	LEDLima L15-18W-3000-U19-BLE	TL 1x35W	18	2070	110	19	3000
542005004600	LEDLima L15-18W-4000-U19-BLE	TL 1x35W	18	2160	115	19	4000
542005004500	LEDLima L12-30W-3000-BLE	TL 1x54W	30	3300	110	22	3000
542005004400	LEDLima L12-30W-4000-BLE	TL 1x54W	30	3450	115	22	4000
542005004300	LEDLima L15-36W-3000-BLE	TL 1x80W	36	3960	110	22	3000
542005004200	LEDLima L15-36W-4000-BLE	TL 1x80W	36	4140	115	22	4000
542006001000	LEDPanelSp-Z L1222-75W-BLE-3000-AL	TL 2x58W	75	7875	105	19	3000
542006000900	LEDPanelSp-Z L1222-75W-BLE-4000-AL	TL 2x58W	75	7875	105	19	4000
140063611	LEDDownlightRc-P-HG R150-11.5W-BLE-3000	CFL 1x18W	11.5	1150	100	19	3000
140063612	LEDDownlightRc-P-HG R150-11.5W-BLE-4000	CFL 1x18W	11.5	1200	102	19	4000
140063613	LEDDownlightRc-P-HG R200-15W-BLE-3000	CFL 1x26W	15	1600	105	19	3000
140063614	LEDDownlightRc-P-HG R200-15W-BLE-4000	CFL 1x26W	15	1660	107	19	4000
140063615	LEDDownlightRc-P-HG R200-23W-BLE-3000	CFL 2x26W	23	2350	100	19	3000
140063616	LEDDownlightRc-P-HG R200-23W-BLE-4000	CFL 2x26W	23	2400	102	19	4000
140063617	LEDDownlightRc-P-HG R200-33W-BLE-3000	CFL 2x32W	33	3360	103	22	3000
140063618	LEDDownlightRc-P-HG R200-33W-BLE-4000	CFL 2x32W	33	3500	105	22	4000
140063619	LEDDownlightRc-P-MW R150-11.5W-BLE-3000	CFL 1x18W	11.5	1150	100	19	3000
140063620	LEDDownlightRc-P-MW R150-11.5W-BLE-4000	CFL 1x18W	11.5	1200	102	19	4000
140063621	LEDDownlightRc-P-MW R200-15W-BLE-3000	CFL 1x26W	15	1600	105	19	3000
140063622	LEDDownlightRc-P-MW R200-15W-BLE-4000	CFL 1x26W	15	1660	107	19	4000
140063623	LEDDownlightRc-P-MW R200-23W-BLE-3000	CFL 2x26W	23	2350	100	19	3000
140063624	LEDDownlightRc-P-MW R200-23W-BLE-4000	CFL 2x26W	23	2400	102	19	4000
140063625	LEDDownlightRc-P-MW R200-33W-BLE-3000	CFL 2x32W	33	3360	103	22	3000
140063626	LEDDownlightRc-P-MW R200-33W-BLE-4000	CFL 2x32W	33	3500	105	22	4000
543022010000	LEDWaterproof-P2 L1563-28W-4000-BLE	TL 1x58W	28	3080	110	n/a	4000
543022010600	LEDWaterproof-P2 L1263-45W-4000-BLE	TL 2x36W	45	4950	110	n/a	4000
543022009900	LEDWaterproof-P2 L1563-55W-4000-BLE	TL 2x58W	55	6050	110	n/a	4000

Accessories



140063563
LED Smartlight Rc-Sensor



560098000600
LED Smart-Sensor Surface-Module-WH



140063564
LED Smartlight-Switch










506006003100
LED Smart-Relay-500W



Sensor range:10m

Dimensional Drawing (mm)

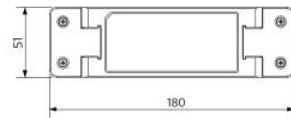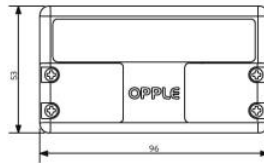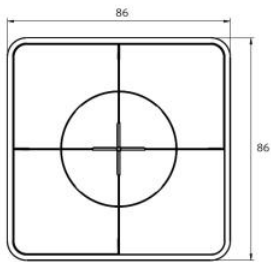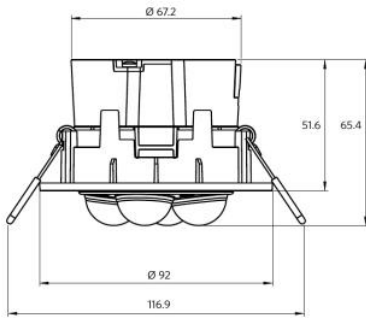

Installation Opening Drawing (mm)

LED Smartlight Rc-Sensor
Ø76

