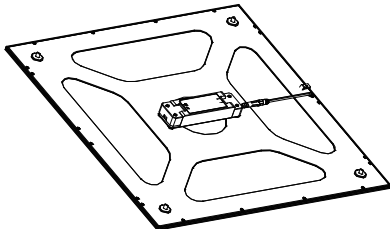
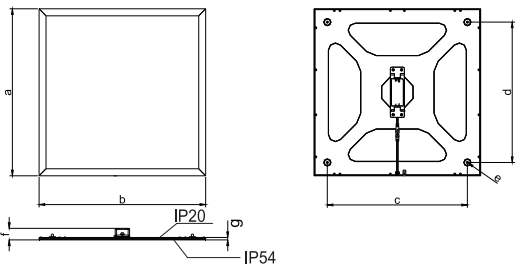


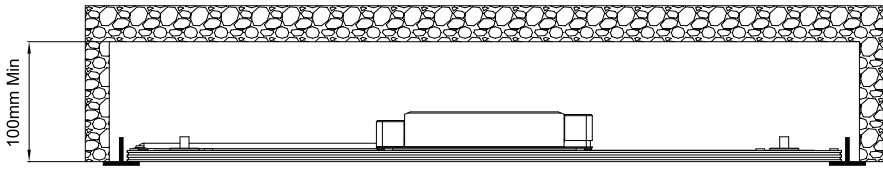

LED Slim Panel Performer

Item Code	CCT	kg
140063733	4000K	4.0kg
140057770*	\	0.13kg

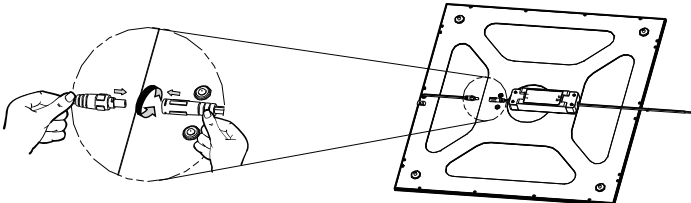
* Accessories should be purchased separately.


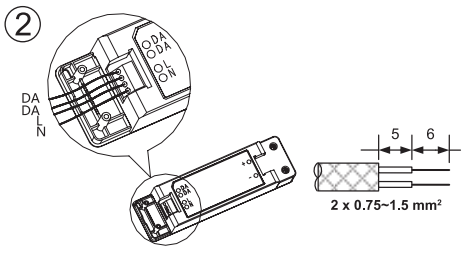
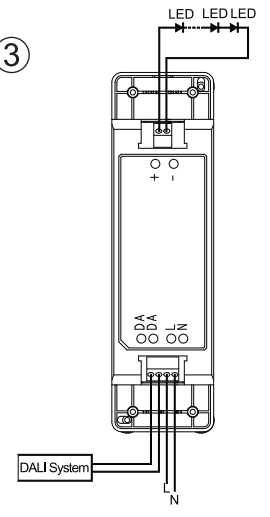

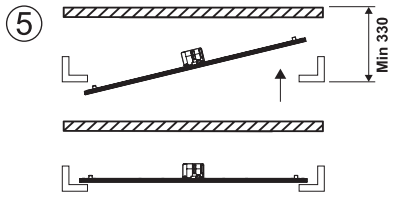
Model Name	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	Actilume Controller
LED PL-RC-S-S595-30W U19-IP54	595	595	500	500	4x M40,7P	41.3	9	YES

Do not cover with insulation material




Recessed Mounting (Lay-in)

- 
- 
- 
- 
- 

Recessed Mounting (Clips)

Type	A(mm)	B(mm)
LED PL-RC-S-S595-30W U19-IP54	580	580

Clips should be purchased separately as accessory



Luminaires not suitable for covering with thermally insulating material.
 Leuchten sind nicht mit thermisch isolierenden Materialien abzudecken.



In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

Caution: Any operation on LED module is forbidden while power-on.

Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.

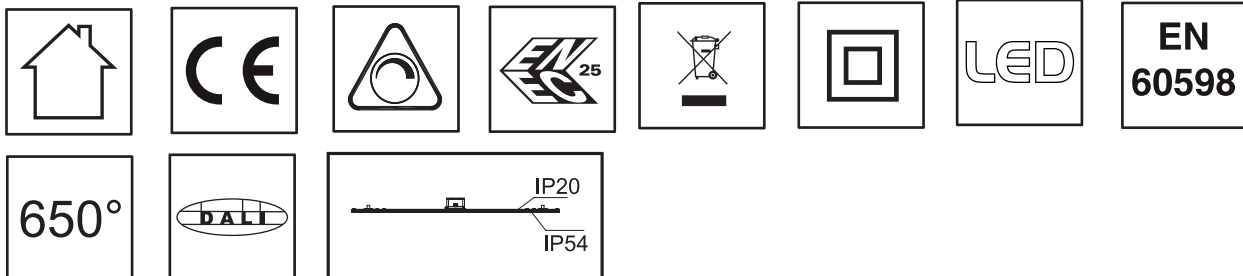
Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.



For non-user replaceable light sources.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Terminal block not included. Installation may require advice from a qualified person.
 Only use suitable connection boxes with internal terminal blocks conform to EN60998-2-1 or EN60998-2-2. Terminal should be capable for at least 450V 16A, 0.75mm² wiring.



Data subject to change
 Les données sont sujettes à modifications
 Änderungen vorbehalten

Suzhou Oppl Lighting Co., Ltd.
 215200
 East Side, Fenyang Road,
 Fenu Economic Development Zone,
 Wujiang City, Jiangsu Province,
 P.R. China

OPPLE Lighting B.V
 Materialweg 6-6A
 5681 RJ Best
 The Netherlands
 service@opple.com
 www.opple.com