



## Wall-Mounted Performer

- Robust, waterproof IP65 luminaire with high impact protection (IK10)
- Well integrated in architecture thanks to its comfortable light distribution
- Designed to be easy to install and maintain with up to 2.5mm<sup>2</sup> through-wiring possibility
- Suitable for both indoor and outdoor applications



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
Emergency version 1 hour, 1-10V								
543011003600	LEDWall-Mounted-P Rd300-15W-EM1	CFL 2x18W	15	1750	115	3000/4000	No	1.48

## Accessories



821017003000  
LEDSmart-BLE2-10V-Converter

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
543011003600	LEDWall-Mounted-P Rd300-15W-EM1	94051190	325x87x328	1.68	6941408851563	1
821017001400	LEDSmart-BLE-10V-Converter	94059200	90x40x30	0.09	6941408898445	1
821017003000	LEDSmart-BLE2-10V-Converter	94059200	90x40x30	0.09	6931783007624	1

Technical Specifications	
Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	1-10V
Sensor type	No sensor
Sensor technology	No sensor
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP65
Impact strength	IK10
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Polycarbonate
Optical material	Polycarbonate

Ambient Conditions	
Operating temperature	-30~+50°C
Application temperature	+25°C
Storage environment	-30~+60°C

**5 YEARS WARRANTY**



**ENERGY**

OPPLE Lighting  
543011003600

A  
B  
C  
D  
E  
F  
G


**E**

**15**  
kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LEDWall-Mounted-P Rd300

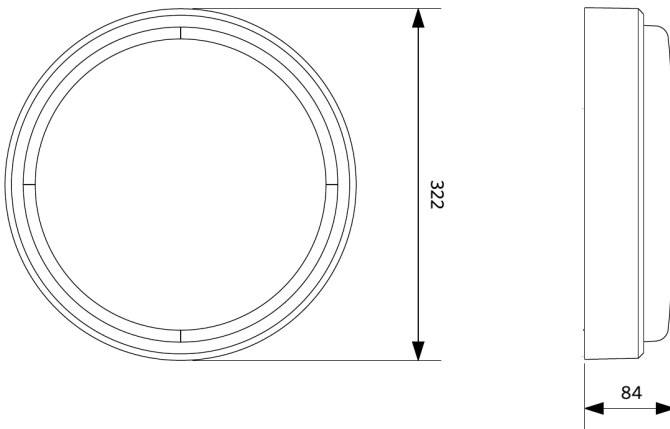

## Photometric Data

