



## LED T5 Batten EcoMax

- Uniform, diffused light, creating a pleasant atmosphere
- Trailing edge dimmable
- Up to 50% lower energy consumption
- Battens connect up to 15 meters
- Incl. power cable, mounting and connection pieces (fixed and flexible)
- With transparent end caps



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level	Weight (kg/pc)
140043898	LED E T5 batten 600 9W 800lm 3000K CT	TL 1x18W	9	800	89	3000	A+	0.14
140043899	LED E T5 batten 600 9W 800lm 4000K CT	TL 1x18W	9	800	89	4000	A+	0.14
140043900	LED E T5 batten 1200 18W 1600lm 3000K CT	TL 1x36W	18	1600	89	3000	A+	0.24
140043901	LED E T5 batten 1200 18W 1600lm 4000K CT	TL 1x36W	18	1600	89	4000	A+	0.24
140062784	LED P T5 batten 600 9W DIM 3000K CT	TL 1x18W	9	1000	111	3000	A+	0.29
140062783	LED P T5 batten 600 9W DIM 4000K CT	TL 1x18W	9	1000	111	4000	A+	0.29
140062786	LED P T5 batten 1200 18W DIM 3000K CT	TL 1x36W	18	2000	111	3000	A+	0.41
140062785	LED P T5 batten 1200 18W DIM 4000K CT	TL 1x36W	18	2000	111	4000	A+	0.41

See appendix 1 for dimmer compatibility list.

Technical Specifications	
Lifespan (L70B50)	40,000 h
Lifespan (L80B50)	30,000 h
On-/Off-cycles	100,000
Dimmable	No / Yes (DIM)
Beam angle	140 °
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Risk group	RG0
Control gear included	Yes
Power factor	≥ 0.90

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No


Mechanical Properties	
Material housing	Polycarbonate (PC)

Ambient Conditions	
Operating temperature	-20 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C



# Dimensional Drawing (mm)

LED E T5 batten 600  
LED P T5 batten 600

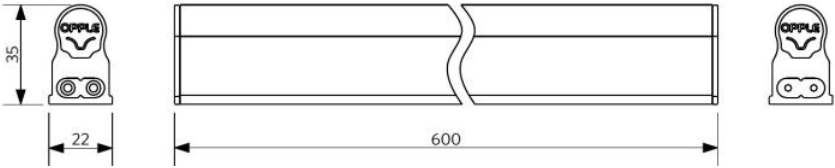

LED E T5 batten 1200  
LED P T5 batten 1200

